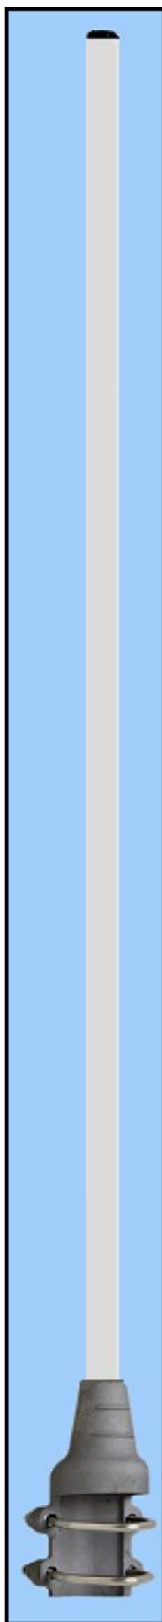


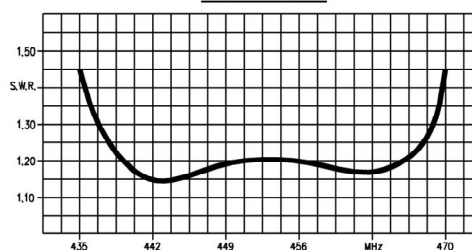
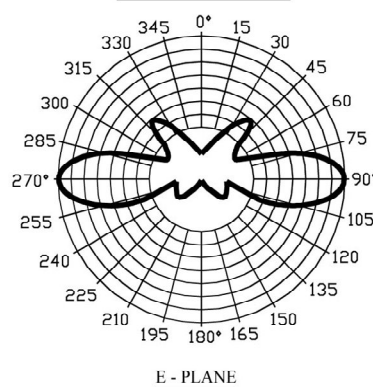
**Omnidirectional antenna**

435 – 470 MHz

**T-OC.435-470.05****TECHNICAL DATA:**

Impedance ( Ohms ):	50
Frequency range:	435 ÷ 470 MHz
V.S.W.R:	less than 1.5
Beamwidth -3 dB:	30°
Polarization:	Vertical
Connector:	N-female
Mounting:	on masts from 33 to 60 mm diam.
Gain ( dBi ):	5
Max power ( W ):	100
Wind resistance:	160 Km/h
Temperature ( °C ):	-40° - +85°
Dimensions ( mm ):	1270
Net weight ( g ):	1200
Material	
Bracket:	Aluminium alloy EN AB-44100
Cylindric mast:	Epox glass
Screws and nuts:	Stainless steel

**DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM  
AND CONDENSING HOLE**

V.S.W.R. CURVERADIATION PATTERNE - PLANE

**Walter Krenn**  
Hochfrequenztechnik GmbH

Simmeringer Hauptstraße 421  
1110 Wien, Austria

Tel.: +43-1-748 7117/0

Fax.: +43-1-748 7117/90