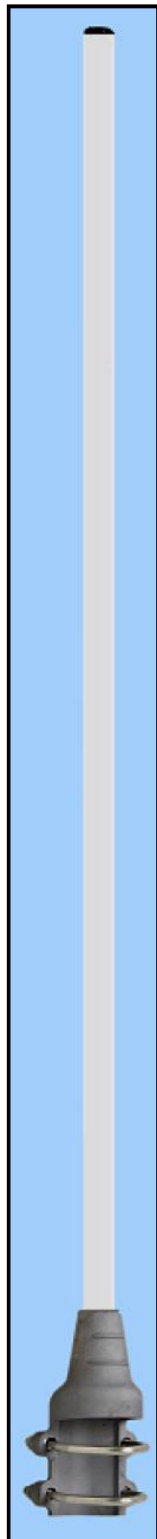


Omnidirectional antenna

147 – 156 MHz

T-OD.147-156.02**TECHNICAL DATA:**

Impedance (Ohms): 50
 Frequency range: 147 ÷ 156 MHz
 V.S.W.R: less than 1.5
 Beamwidth -3 dB: 78°
 Polarization: Vertical
 Connector: N-female
 Mounting: on masts from 33 to
 60 mm diam.
 Gain (dBi): 2
 Max power (W): 100
 Wind resistance: 160 Km/h
 Temperature (°C): -40° - +85°
 Dimensions (mm): 1410
 Net weight (g): 1200

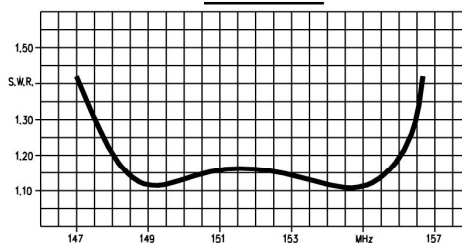

Material

Bracket: Aluminium alloy EN AB-44100

Cylindric mast: Epox glass

Screws and nuts: Stainless steel

**DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM
AND CONDENSING HOLE**

V.S.W.R. CURVERADIATION PATTERN

Walter Krenn
Hochfrequenztechnik GmbH

Simmeringer Hauptstraße 421
1110 Wien, Austria

Tel.: +43-1-748 7117/0

Fax.: +43-1-748 7117/90