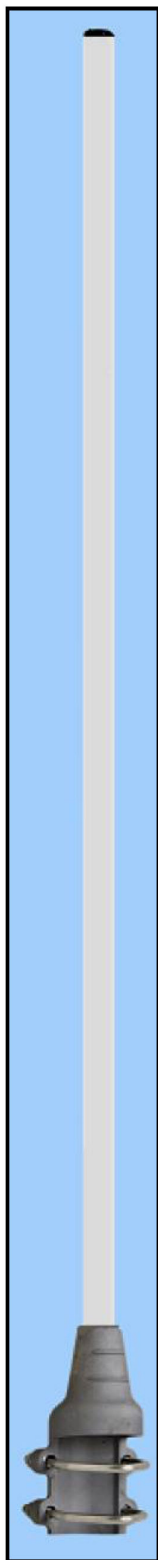


Omnidirectional Antenna

380 – 470 MHz

T-OD.380-470.02**TECHNICAL DATA:**

Impedance (Ohms):	50
Frequency range:	380 ÷ 470 MHz
V.S.W.R	
380 ÷ 470:	less than 1.5
Beamwidth -3 dB:	68°
Polarization:	Vertical
Connector:	N-female
Mounting:	on masts from 33 to 60 mm diam.
Gain (dBi):	2.14
Max power (W):	100
Wind resistance:	160 Km/h
Temperature (°C):	-40° - +85°
Dimensions (mm)	
Lenght:	650
Tube diameter:	24
Net weight (g):	1000
Material	
Bracket:	Aluminium alloy EN AB-44100
Cylindric mast:	Epoxy glass
Screws and nuts:	Stainless steel

DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM
AND CONDENSING HOLE

