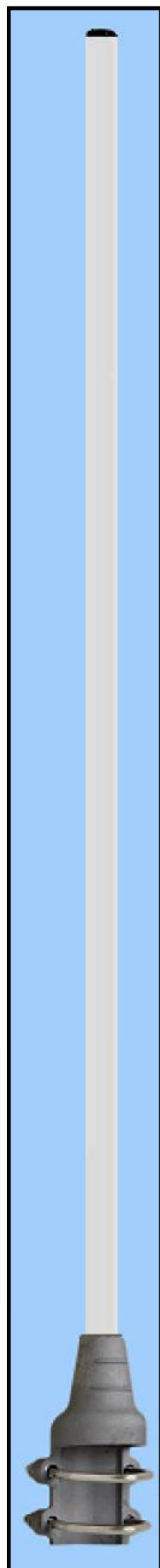


Omnidirectional Antenna

70 - 75 MHz

T-OD.70-75**TECHNICAL DATA:**

Impedance (Ohms):	50
Frequency range:	70 ÷ 75 MHz
V.S.W.R.:	less than 1.6
Beamwidth -3 dB:	78°
Polarization:	Vertical
Connector:	N-female
Mounting:	on masts from 33 to 60 mm diam.
Gain (dBi):	2.14
Max power (W):	100
Wind resistance:	160 Km/Hr
Temperature (°C):	-40° - +85°
Dimensions (mm):	2600
Net weight (g):	2500
Material	


Bracket: Aluminium alloy EN AB-44100

Conic mast: Epox glass

Screws and nuts: Stainless steel

**DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM
AND CONDENSING HOLE**

V.S.W.R. CURVE

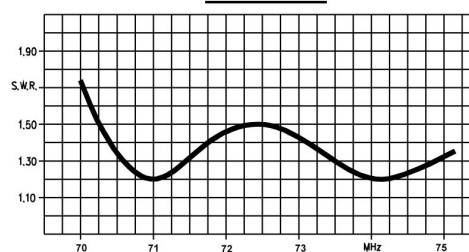

Walter Krenn
Hochfrequenztechnik GmbH

Simmeringer Hauptstraße 421
1110 Wien, Austria

Tel.: +43-1-748 7117/0

Fax.: +43-1-748 7117/90