


# Omnidirectional Antenna

71 - 75 MHz

## T-OD.71-75.02

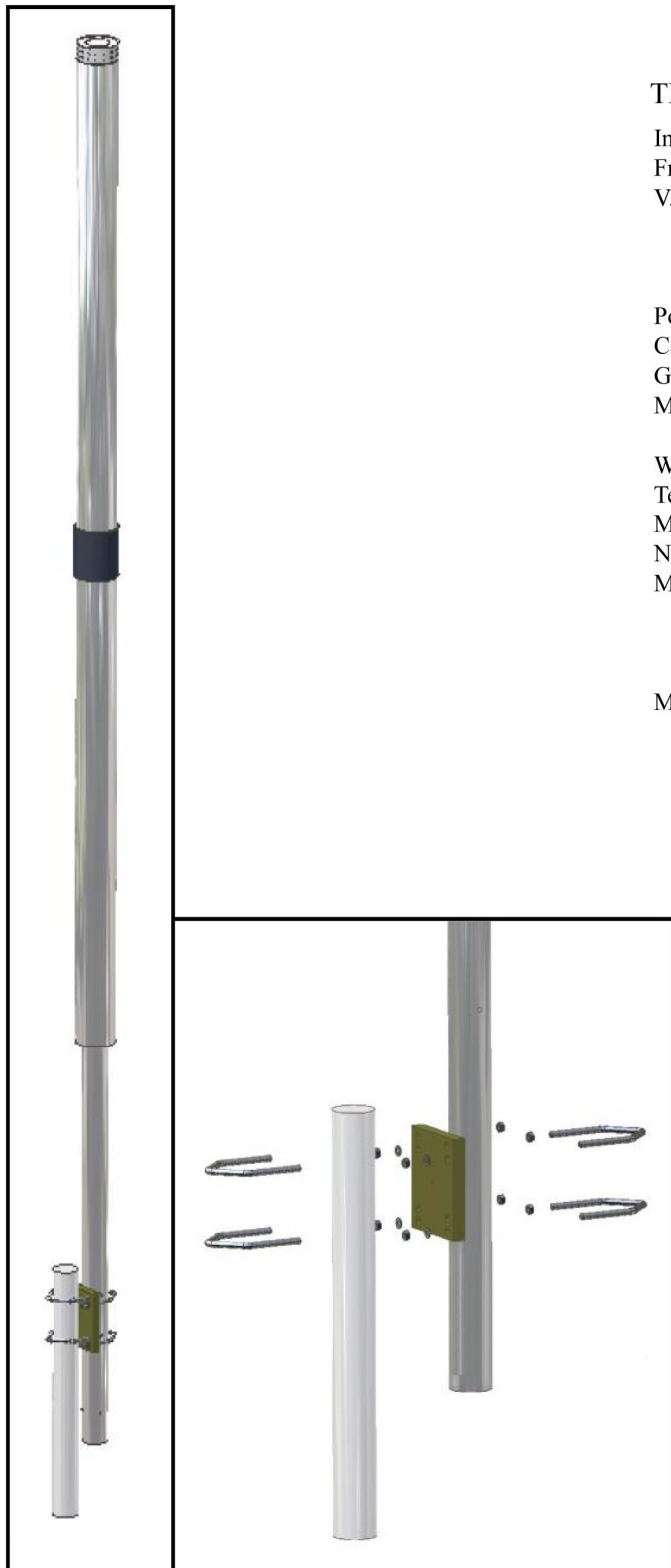

### TECHNICAL DATA:

Impedance ( Ohms ):	50
Frequency range:	71 ÷ 75 MHz
V.S.W.R	
71 ÷ 73MHz:	less than 2.5
73 ÷ 74.6MHz:	less than 1.5
74.6 ÷ 75MHz:	less than 2.5
Polarization:	Vertical
Connector:	N-female
Gain ( dBi ):	2.14
Max power ( W ):	≥ 100
Wind resistance:	≥ 120 Km/Hr
Temperature ( °C ):	-40° - +85°
Max. Dimensions ( mm ):	2880*Ø90
Net weight ( g ):	6000 ± 500
Material	
Bracket:	Aluminum alloy EN AB-44100
Mast:	Passivated aluminum 6060
Screws and nuts:	Stainless steel
Mounting:	on masts from 33 to 60 mm diam.



Walter Krenn  
Hochfrequenztechnik GmbH

Simmeringer Hauptstraße 421  
1110 Wien, Austria

Tel.: +43-1-748 7117/0

Fax.: +43-1-748 7117/90