

Low Noise Coaxial Cable


Solid Polyethylene Dielectric

11-RJV30/61R-N1

0FL1.00806

Specifications:

Impedance	75 $\Omega \pm 4 \Omega$
Inner conductor	Cu 7 x 0,16 mm, \varnothing 0,48 mm
Dielectric	PE, \varnothing 2,95 mm
Coating	Semi conductive PVC, \varnothing 3,50 mm
Shield	Cu braid 88%, \varnothing 3,95mm
Jacket	PVC (black), \varnothing 5,0 mm
Weight	35 kg / km
Capacitance	68 nF / km
Velocity of propagation	66 %
Temperature range	-20 °C to +70 °C
Insulation resistance	$\geq 10^{14} \Omega$
DC resistance	
- Inner conductor	< 125 Ω /km
- Outer conductor	< 18 Ω /km

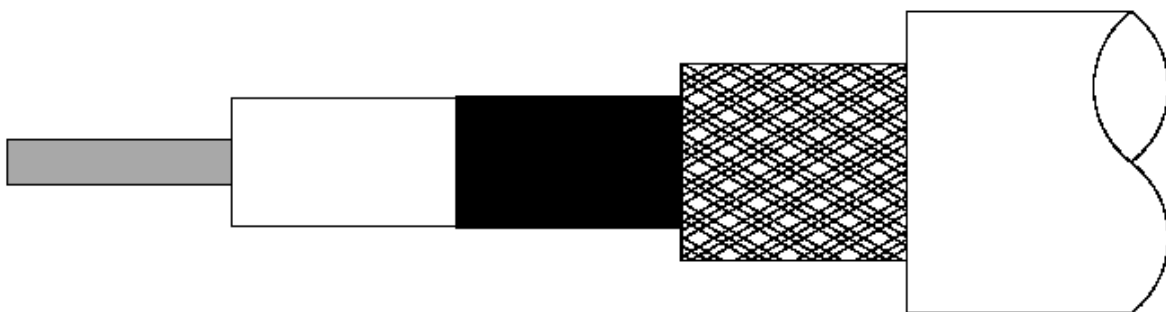

While the information in this datasheet has been carefully compiled to the best of our knowledge, nothing is intended as representation of warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Walter Krenn
Hochfrequenztechnik GmbH

Simmeringer Hauptstraße 421
1110 Wien, Austria

Tel.: +43-1-748 7117/0
Fax.: +43-1-748 7117/90